


N 90, Built-in compact oven with microwave function, 60 x 45 cm, Stainless steel
C28MT27H0B



COOKING PASSION SINCE 1877



Compact built-in oven with integral microwave and MultiPoint roast thermometer - even more ways to cook dishes to perfection, quickly and conveniently

- ✓ CircoTherm® – Smart hot-air solution that lets you bake on up to four levels.
- ✓ Combined microwave and oven - the convenient solution to save space and time
- ✓ Dual cleaning options: Pyrolytic cleaning programmes - just let the oven interior clean itself. EasyClean - the quick and easy option for day to day maintenance.
- ✓ Full Touch Control – Simple, precise control by touch on the high-resolution TFT colour display.
- ✓ Home Connect – Unleash your creativity via app.

Features

Technical Data

Type of micro-wave oven : MW-Combi
Type of control : Electronic
Color / Material Front : Stainless steel
Cavity dimensions : 237.0 x 480 x 392.0 mm
Approval certificates : CE, VDE
Length of electrical supply cord : 150 cm
Net weight : 37.933 kg
Gross weight : 40.2 kg
EAN code : 4242004236535
Maximum micro-wave power : 900 W
Connection rating : 3600 W
Fuse protection : 16 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Plug type : no plug
Cavity dimensions : 237.0 x 480 x 392.0 mm



4 242004 236535

Optional accessories

Z11AB15A0 Baking tray, non-stick ceramic coated
Z11SZ00X0 SeamlessCombination mounting kit
Z11SZ60X0 SeamlessCombination 45 + 14cm
Z11SZ90X0 SeamlessCombination 60 + 45cm
Z12CB10A0 Baking tray, anthracite enamelled
Z12CM10A0 Moussaka pan, anthracite enamelled
Z12CQ10A0 Grill tray, anthracite enamelled
Z13CV06S0 Decor strip
Z1913X0 Baking Stone

*N 90, Built-in compact oven with microwave
function, 60 x 45 cm, Stainless steel
C28MT27H0B*



COOKING PASSION SINCE 1877

Features

Design

- 5.7" TFT colour and graphics display with FullTouch control
- Cavity inner surface: enamel anthracite
- Drop down door, SoftClose, soft opening
- Touch control
- Bar handle
- We recommend you to choose complementary products within N90, in order to assure an optimal design combination of your Built-In appliances.

Features

- HomeConnect ready on WLAN
- Door lock during pyrolytic cleaning
Control panel lock
Automatic safety switch off
Residual heat indicator
Start button
Door contact switch
- Temperature proposal
Actual temperature display
Heating up indicator
automatic programmes:
Temperature probe
- Baking and roasting assistant, Automatic programmes
- Intelligent microwave inverter technology: For optimised results maximum output power will be regulated to 600 W when used in longer operation for gentler cooking.
- MultiPoint MeatProbe
- LED light, On/off button
- Cooling fan
- Electronic clock timer
- 3 shelf positions

Cleaning

- Pyrolytic cleaning
- EasyClean

Programmes/functions

- Compact oven with microwave with 13 main functions heating methods: CircoTherm®, CircoTherm® Gentle, Top/bottom heat, Conventional heat Gentle, Circo-roasting, Full surface grill, Centre surface grill, CircoTherm® intensive, Bottom heat, Low temperature cooking, Dough proving, Plate warming, Keep warm
- Additional heating methods with microwave: Microwave, Microwave combination cooking
- Max. Power: 900 W; 5 Microwave power settings (90 W, 180 W, 360 W, 600 W, 900 W)
- Number of automatic programmes: 14
- Rapid heat

Accessories

- 1 level telescopic shelf, pyrolytic proof
- 1 x combination grid, 1 x universal pan



Performance/technical information

- Cavity volume: 45 litre
- Temperature range 30 °C - 275 °C
- Power cord length 150 cm Cable length
- Total connected load electric: 3.6 KW
- Nominal voltage: 220 - 240 V
- Appliance dimension (hxwxd): 455 mm x 596 mm x 548 mm
- Niche dimension (hxwxd): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

N 90, Built-in compact oven with microwave
function, 60 x 45 cm, Stainless steel
C28MT27H0B

Dimensioned drawings

Installation with a hob.

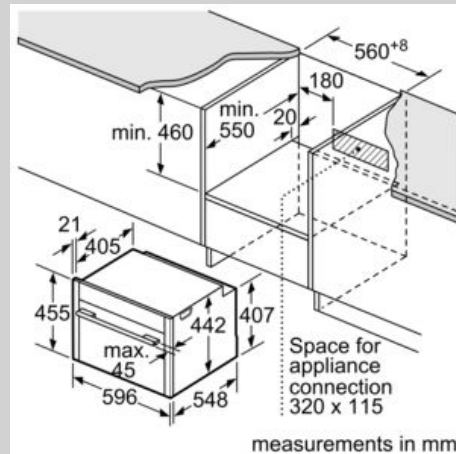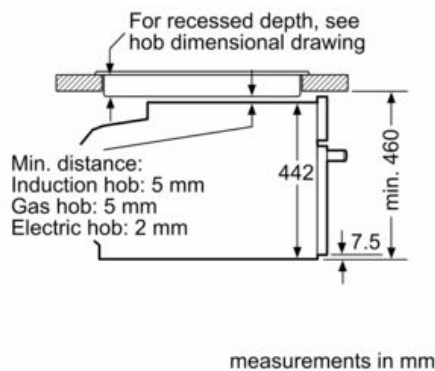

If the compact appliance will be installed
underneath a hob, the following worktop
thicknesses (including substructure if
necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm

