



Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

- $\sqrt{}$ Oven fit: bring harmony to your kitchen
- $\sqrt{}$ Automatic Air Sensor Adjusts the extraction rate automatically.
- $\sqrt{\,}$ Efficient Drive Motor Quiet and energy-efficient hood motor for a calmer kitchen.
- $\sqrt{\,}$ TouchControl: thanks to the integrated flat surface of the control panel, adjustments can be easily made with just one finger
- $\sqrt{}$ Intensive speed setting: increases the extraction rate when the steam gets intense

В





Ontional accessories

Z51ITD1X1 Long Life recirculation kit external
Z51IXB1X6 Clean Air Plus odor filter (replacement)
Z51IXC1X6 Clean Air Plus recirc. kit external
Z54TC02X0 Standard odor filter (replacement)
Z54TL90X1 Lowering frame

Z54TM90X0 Installation kit for 90cm wide wall unit Z54TS02X0 Standard recirculation kit

Feature:

Technical Data

Typology: Pull-out

Approval certificates : CE, E17D UKCA marking, VDE

Length of electrical supply cord : 175 $\,$ cm

Required niche size for installation (HxWxD) : 385mm x 524.0mm x

290mm mm

Minimum distance above an electric hob : $430\,$ mm Minimum distance above a gas hob : $650\,$ mm

Net weight : 14.431 kg Type of control : Electronic

Number of speed settings : 3-stage + 2 intensive Maximum output air extraction : $395 \text{ m}^3/\text{h}$ Boost position output recirculating : $641 \text{ m}^3/\text{h}$ Maximum output recirculating air : $358 \text{ m}^3/\text{h}$ Boost position air extraction : $700 \text{ m}^3/\text{h}$

Number of lights (Stck): 3 Noise level: 53 dB(A) re 1 pW Diameter of air outlet: 120 / 150 mm Grease filter material: Washable stainless steel

EAN code: 4242004251224 Connection rating: 146 W Fuse protection: 10 A Voltage: 220-240 V Frequency: 50; 60 Hz Plug type: GB plug Installation type: Built-in





N 90, Telescopic cooker hood, 90 cm, Stainless



Features

- ClimateControl sensor
- Touch control with 7 segment LED display
- 3 power levels and 2 intensive settings
- SoftLight with dimmer function
- 3 x 1,5W LED
- Efficient BLDC technology
- Noise reduction function
- Interval operation
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 minutes))
- 3 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter

Design

- 90 cm wide
- Handle strip specification: N6-design with logo
- Steel filter cover

Performance

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm: max. Normal use 395 m³/h Intensive 700 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 53 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust

Max. normal use: 53 dB(A) re 1 pW Intensive: 69 dB(A) re 1 pW

• With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:

Extraction rate in recirculation mode: Max. normal use: 358 m³/h

Intensive: 641 m³/h

Noise level in recirculation mode: Max. normal use: 60 dB(A) re 1 pW Intensive: 71 dB(A) re 1 pW

- Colour Temperature: 3500 K
- Light Intensity: 355 lux
- Average Energy Consumption: 38.8 kWh/year*
- Blower Efficiency Class: B* • Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Power rating: 146 W


Planning and installation information

- Installation system: Telescopic comfort installat.
- Dimensions (HxWxD): 426 x 898 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m
- * In accordance with the EU-Regulation No 65/2014



N 90, Telescopic cooker hood, 90 cm, Stainless steel D49PU54X1B



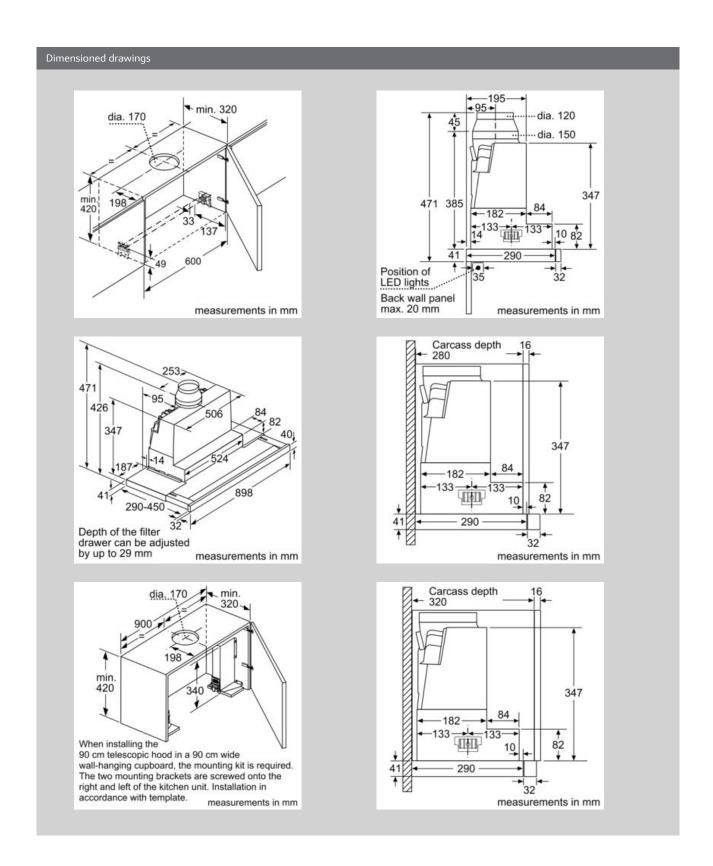

N 90, Telescopic cooker hood, 90 cm, Stainless steel D49PU54X1B

