


N 30, Canopy cooker hood, 53 cm, Silver metallic
D5655X1GB



COOKING PASSION SINCE 1877

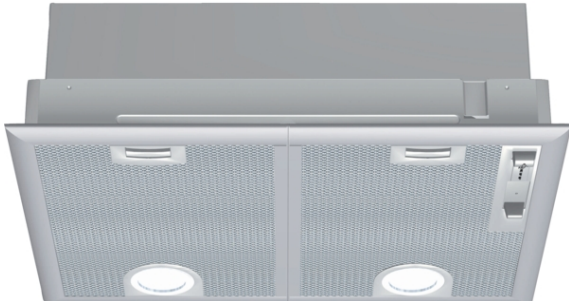

C

Canopy hood: designed to fit neatly under an overhead unit or cabinet. They're discreet and effectively use valuable space.

- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED Lighting – Clear illumination while you cook.
- ✓ High extraction rate - for continuously clean air in the kitchen.
- ✓ Reduced Noise: the low-noise motor makes it possible to listen to your own kitchen story

Features

Technical Data

Typology : Built-in/Built-under
Approval certificates : CE, E17D UKCA marking, VDE
Length of electrical supply cord : 130 cm
Required niche size for installation (HxWxD) : 255mm x 500.0mm x 350mm mm
Minimum distance above an electric hob : 650 mm
Minimum distance above a gas hob : 650 mm
Net weight : 7.708 kg
Type of control : mechanical
Maximum output air extraction : 363 m³/h
Boost position output recirculating : 395.0 m³/h
Maximum output recirculating air : 268 m³/h
Boost position air extraction : 618 m³/h
Number of lights (Stck) : 2
Noise level : 56 dB(A) re 1 pW
Diameter of air outlet : 120 / 150 mm
Grease filter material : Washable aluminium
EAN code : 4242004237136
Connection rating : 206 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50 Hz
Plug type : GB plug
Installation type : Built-in

Optional accessories

Z5155X0 Standard odor filter



4 242004 237136

N 30, Canopy cooker hood, 53 cm, Silver metallic
D5655X1GB



COOKING PASSION SINCE 1877

Features

Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 362 m³/h
Intensive 618 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 56 dB dB*

Features

- Slide control operation
- 3 speeds plus intensive
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 metal grease filter cassettes

Design

- For installation in a chimney or unit, above a hob
- Canopy hood
- Mechanical controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction charcoal filter (accessory) needed
- Max. extraction rate: 618 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 56 dB(A) re 1 pW
Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 438 lux
- Electrical cable length 1.3 m
- Diameter pipe ø 150 mm (ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 530 x 380 mm
- Dimensions recirculating (HxWxD): 255-255 x 530 x 380 mm
- Mounting dimensions: width: 50 cm, depth: 35 cm
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 79.8 kWh/year*

Optional accessories

- Recirculating kit Z5155X0

* In accordance with the EU-Regulation No 65/2014

Dimensioned drawings

