


N 30, Canopy cooker hood, 75 cm, Silver metallic  
D5855X1GB



COOKING PASSION SINCE 1877

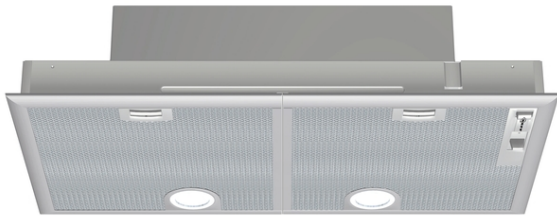

C

Canopy hood: designed to fit neatly under an overhead unit or cabinet. They're discreet and effectively use valuable space.

- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED Lighting – Clear illumination while you cook.
- ✓ High extraction rate - for continuously clean air in the kitchen.
- ✓ Reduced Noise: the low-noise motor makes it possible to listen to your own kitchen story

#### Features

##### Technical Data

Typology : Built-in/Built-under  
Approval certificates : CE, E17D UKCA marking, VDE  
Length of electrical supply cord : 130 cm  
Required niche size for installation (HxWxD) : 255mm x 700.0mm x 350mm mm  
Minimum distance above an electric hob : 650 mm  
Minimum distance above a gas hob : 650 mm  
Net weight : 9.309 kg  
Type of control : mechanical  
Maximum output air extraction : 379 m<sup>3</sup>/h  
Boost position output recirculating : 408.0 m<sup>3</sup>/h  
Maximum output recirculating air : 278 m<sup>3</sup>/h  
Boost position air extraction : 638 m<sup>3</sup>/h  
Number of lights (Stck) : 2  
Noise level : 56 dB(A) re 1 pW  
Diameter of air outlet : 120 / 150 mm  
Grease filter material : Washable aluminium  
EAN code : 4242004237150  
Connection rating : 206 W  
Voltage : 220-230 V  
Frequency : 50 Hz  
Plug type : GB plug  
Installation type : Built-in

#### Optional accessories

Z5155X0 Standard odor filter



4 242004 237150

## Features

### Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 379 m<sup>3</sup>/h  
Intensive 638 m<sup>3</sup>/h
- Noise max. Normal Level: Noise, max. speed in normal us: 56 dB dB\*

### Features

- Slide control operation
- 3 speeds plus intensive
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 metal grease filter cassettes

### Design

- For installation in a chimney or unit, above a hob
- Canopy hood
- Mechanical controls

### Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction charcoal filter (accessory) needed
- Max. extraction rate: 638 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:  
Max. normal use: 56 dB(A) re 1 pW  
Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 410 lux
- Electrical cable length 1.3 m
- Diameter pipe ø 150 mm (ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 730 x 380 mm
- Dimensions recirculating (HxWxD): 255-255 x 730 x 380 mm
- Blower Efficiency Class: D\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 81.2 kWh/year\*

### Optional accessories

- Recirculating kit Z5155X0

\* In accordance with the EU-Regulation No 65/2014

N 30, Canopy cooker hood, 75 cm, Silver metallic  
D5855X1GB



COOKING PASSION SINCE 1877

Dimensioned drawings

