

**Serie | 4, Built-under cooker hood, 60 cm, Stainless steel  
DUL63CC50B**



**Optional accessories**

DHZ2701 : Standard odor filter

**D**

**Conventional cooker hoods are mounted under cabinets and always visible, allowing you to keep your storage space.**

- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- An impressive extraction rate of m<sup>3</sup>/h ensures this hood will have your kitchen odour free in no time.
- 3-speed power Level options to suit your cooking style and recipes.
- Dishwasher safe aluminum mesh filters
- Ducted or Non-ducted Options

**Technical Data**

Typology : Built-in/Built-under

Approval certificates : CE

Length of electrical supply cord : 145 cm

Minimum distance above an electric hob : 650 mm

Minimum distance above a gas hob : 650 mm

Net weight : 5.226 kg

Type of control : mechanical

Number of speed settings : 3

Maximum output air extraction : 350 m<sup>3</sup>/h

Maximum output recirculating air : 110 m<sup>3</sup>/h

Number of lights (Stck) : 2

Noise level : 72 dB(A) re 1 pW

Diameter of air outlet : 120 / 100 mm

Grease filter material : Washable aluminium

EAN code : 4242002968513

Connection rating : 146 W

Voltage : 220-240 V

Frequency : 50 Hz

Plug type : GB plug

Installation type : Built-under



## **Serie | 4, Built-under cooker hood, 60 cm, Stainless steel DUL63CC50B**

**Conventional cooker hoods are mounted under cabinets and always visible, allowing you to keep your storage space.**

---

### **Key performance features:**

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Maximum extraction 350 m<sup>3</sup>/h
- Noise max. Normal Level: Noise, max. speed in normal us: 72 dB dB\*

### **Features**

- Push button control for extractor speeds and light
- 3 power levels
- 2 x 4W LED light
- Colour Temperature: 3000 K
- 2 removable metal grease filter cassettes

### **Design**

- Built under conventional hood
- Installation: Wall or under hang-up cupboard
- Adjustable glass visor
- Push button control
- Mechanical

### **Performance/technical information**

- Suitable for ducted or recirculating operation
- For recirculated extraction charcoal filter (accessory) needed
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 72 dB (A) re 1pW
- Power rating: 146 W
- Light Intensity: 45 lux
- Electrical cable length 1.45 m
- Blower Efficiency Class: E\*
- Lighting Efficiency Class: E\*
- Grease Filtering Efficiency Class: C\*
- Average Energy Consumption: 93.3 kWh/year\*
- Diameter pipe Ø 120 mm (Ø 100 mm enclosed)
- Dimensions exhaust air (HxWxD): 150-150 x 600 x 482 mm
- Dimensions recirculating (HxWxD): 150-150 x 600 x 482 mm


### **Optional accessories**

- Recirculating kit DHZ2701

\* In accordance with the EU-Regulation No 65/2014

**Serie | 4, Built-under cooker hood, 60 cm,  
Stainless steel  
DUL63CC50B**

---

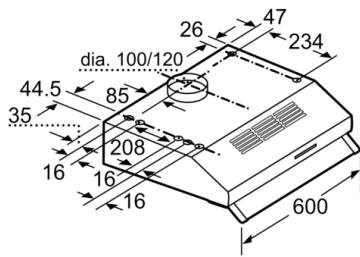

measurements in mm